

DELTA[®]

DELTA[®] protects property. Saves energy. Creates comfort.



COSELLA DÖRKEN

DELTA[®]-FL

Keeping Floors Warm & Dry.[™]
The perfect plastic subfloor system for installed
concrete and slab on grade floors.




PREMIUM QUALITY

- Moisture protection and thermal break for installed concrete floors
- For residential and light commercial construction
- No open seams. No moisture. No mold.

Keeping Floors Warm and Dry.™

DELTA®-FL

Freedom of choice in building y

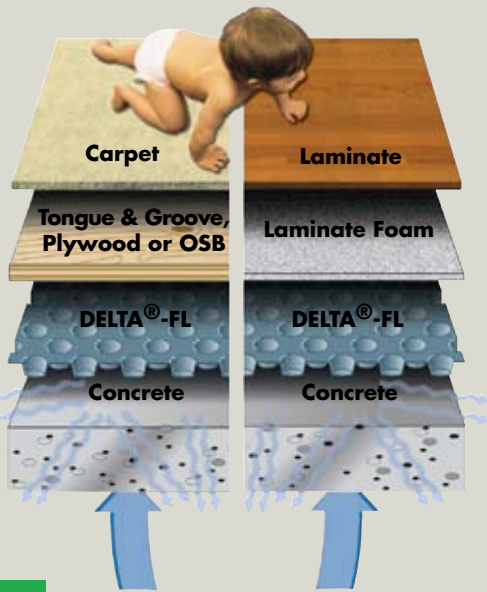

PREMIUM QUALITY





your subfloor system.

- DELTA®-FL rolls out to create a water-vapor proof seamless subfloor preventing moisture rise that would damage floor finishes*.
- Up to 30% increase in floor temperature.
- Protects floor finishes from moisture.
- Laminate can be directly installed on DELTA®-FL.
- Instant comfort and warmth.
- Fast and easy to level and install.
- DELTA®-FL will never rot, unlike other subfloor systems.
- Unlike 2' x 2' panels, there are no open seams that could create mold.
- Provides an insulation thermal air-gap barrier that separates your finished floor from the concrete floor.
- Provides a strong even subfloor.
- Offers minimal reduction in head room, adds only 5/16" (8 mm) height to the floor.
- Provides a clear drainage path underneath the floor, to allow moisture to move to drains, if necessary.
- Allows airflow under the floor.
- Creates a vapor pressure equilibrium between the air-gap created by DELTA®-FL and the soil/concrete below, stopping the moisture drive into the interior and providing a healthier, less humid climate.



Laminate can be placed directly on DELTA®-FL.

*seams are sealed with DELTA®-MOISTURE PROOF TAPE.



Typical carpet installation.

Material	High Density Polyethylene (HDPE)
Color:	Grey
Dimple Height:	5/16" (8 mm)
Working Temperature:	-22°F to + 176°F -30°C to + 80°C
Air-Gap Volume:	~ 0.13 gal/ft. ² (5.3 litres/m ²)
Compressive Strength:	~5200 psf (~250 kN/m ²)
Toxicity:	Non-toxic, Non-polluting
Service Life Expectancy:	The Life Of The Structure
Roll Sizes:	3.5'(1.07m) x 30.0'(9.14m) 5.0'(1.52m) x 65.6'(20.0m)
Sheet Size:	4.0'(1.22m) x 8.00'(2.45m)

DELTA®

COSELLA DÖRKEN

Cosella-Dörken Products Inc.
4655 Delta Way
Beamsville, Ontario
L0R 1B4
(905) 563-3255
Fax: (905) 563-5582
1-888-4 DELTA 4
info@cosella-dorcken.com
DELTAFL.com

A company of the Dörken Group

The information printed in this brochure reflects product information and specifications at the date of printing. The manufacturer reserves the right to make changes when necessary.

DELTA®-branded quality products manufactured by Cosella-Dörken.