

DELTA®

DELTA® protects property. Saves energy. Creates comfort.



COSELLA DÖRKEN

DELTA®-FOOTING BARRIER

Capillary Break Membrane for Footings.™

Part of the DELTA® Premium Moisture Protection System for Basements.



Our DELTA®MS & DELTA®DRAIN products are manufactured using an exclusive three-layer co-extrusion process. The central core contains 100% post-industrial and post-consumer recycled material that captures and reuses material reclaimed from household Blue Boxes. The two outer layers that encase the recycled core are virgin polyethylene that ensures the sustainability and long life of our DELTA®MS & DELTA®DRAIN products for years after installation. By applying the dual principles of recycling and sustainability, Cosella-Dörken Products, Inc. is demonstrating a long term commitment to the environment.

■ Prevents capillary wicking

■ Helps prevent mold


■ Ideal for fully insulated basements

PREMIUM QUALITY

A Simple Solution to a Rising Problem

DELTA®-FOOTING BARRIER

Part of the DELTA® Premium Moisture Protection System

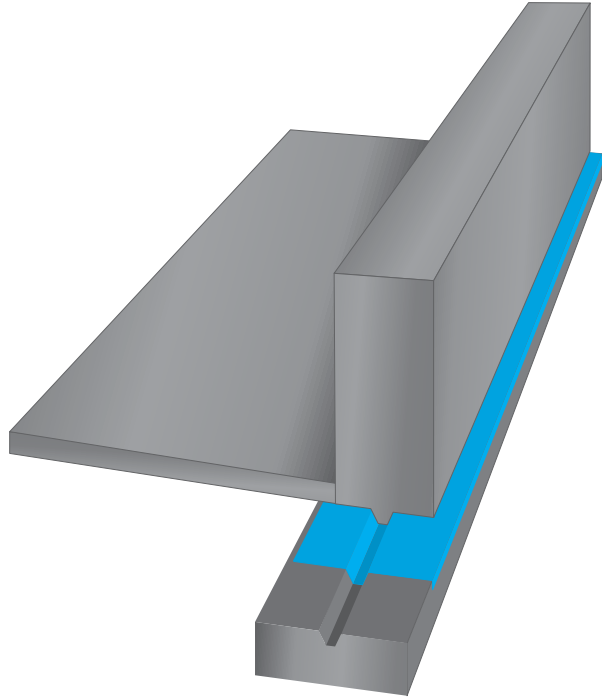

PREMIUM QUALITY



BARRIER

Protection System for Basements.

Capillary rise through footings is a major problem if foundation perimeter walls are finished or insulated. The footings are in constant contact with wet soil.

Capillary wicking transports moisture from the footings up into the bottom part of the wall. Vapor diffusion can continue to carry the moisture into interior wall cavities where it can cause mold and rot.



DELTA®-FOOTING BARRIER is a simple solution to the capillary wicking problem.

DELTA®-FOOTING BARRIER ...


- ... installs easily between footing and basement wall.
- ... prevents capillary wicking and rising dampness.
- ... helps reduce dampness in basements.
- ... helps to prevent mold.
- ... is ideal for fully insulated basements.



DELTA® Premium Moisture Protection System for Basements.

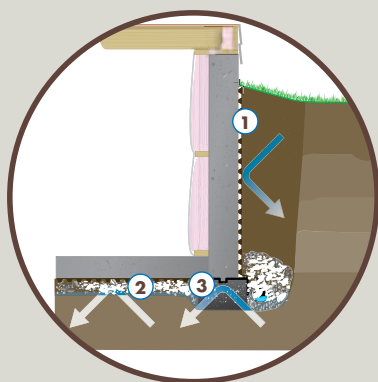

DELTA®-MS/ DELTA®-DRAIN



DELTA®-MS UNDERSLAB



DELTA®-FOOTING BARRIER




Technical Data

Material	3-ply membrane contains polyester needle punched fabric, a Polyethylene barrier membrane, and an anti-slip surface layer
Color	Blue
Application Temperature	Suitable under normal concrete (working) temperature.
Durability	To be covered within 2 weeks after application
Life Expectancy	> 25 years at soil temperatures < 68°F (20°C)
Roll Size	17.7 inches (0.45 m) width x 82 ft (25m) length

DELTA®

**DELTA® protects property, saves energy, creates comfort
... from the basement to the roof.**

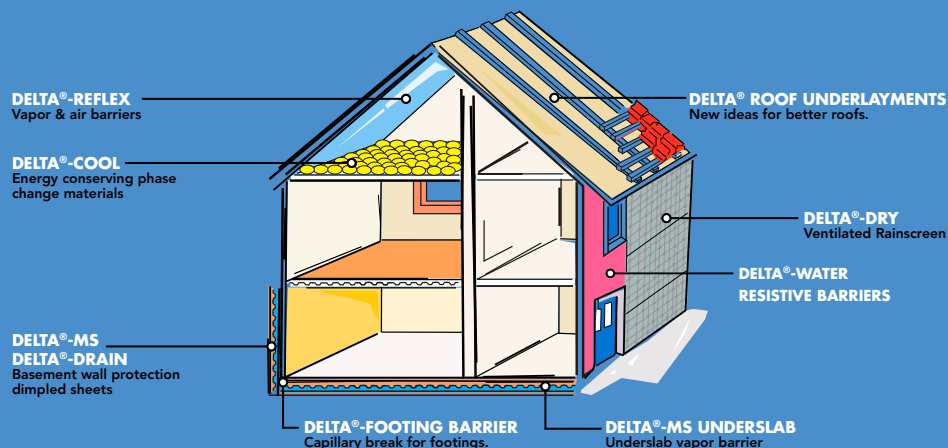

DELTA® products from Cosella-Dörken offer a complete building envelope solution to protect homes against moisture damage.

The information printed in this brochure reflects product information and specifications at the date of printing. The manufacturer reserves the right to make changes when necessary.